




Taylor Canyon Elementary Building Demolition


Addendum #1

RFP 23-001

- Contractor is to backfill with **Random Virgin Structural Fill in 8”-12” lifts to match existing grade to a 90% compaction.**
 - **Bid Alternate #2:** Contractor is to backfill with random virgin structural fill in 8”-12” lifts to 6” below grade. Contractor is to provide and install 6” of **Screened Top Soil.**
 - Ogden School District has provided field dimensions for the tunnels and storage areas below the school. Please use the dimensions provided when calculating the cubic yardage for backfilling. The drawings are included in this Addendum.
- *Contractors submitting a bid are required to acknowledge the addendum on the bid form provided in the bid documents***

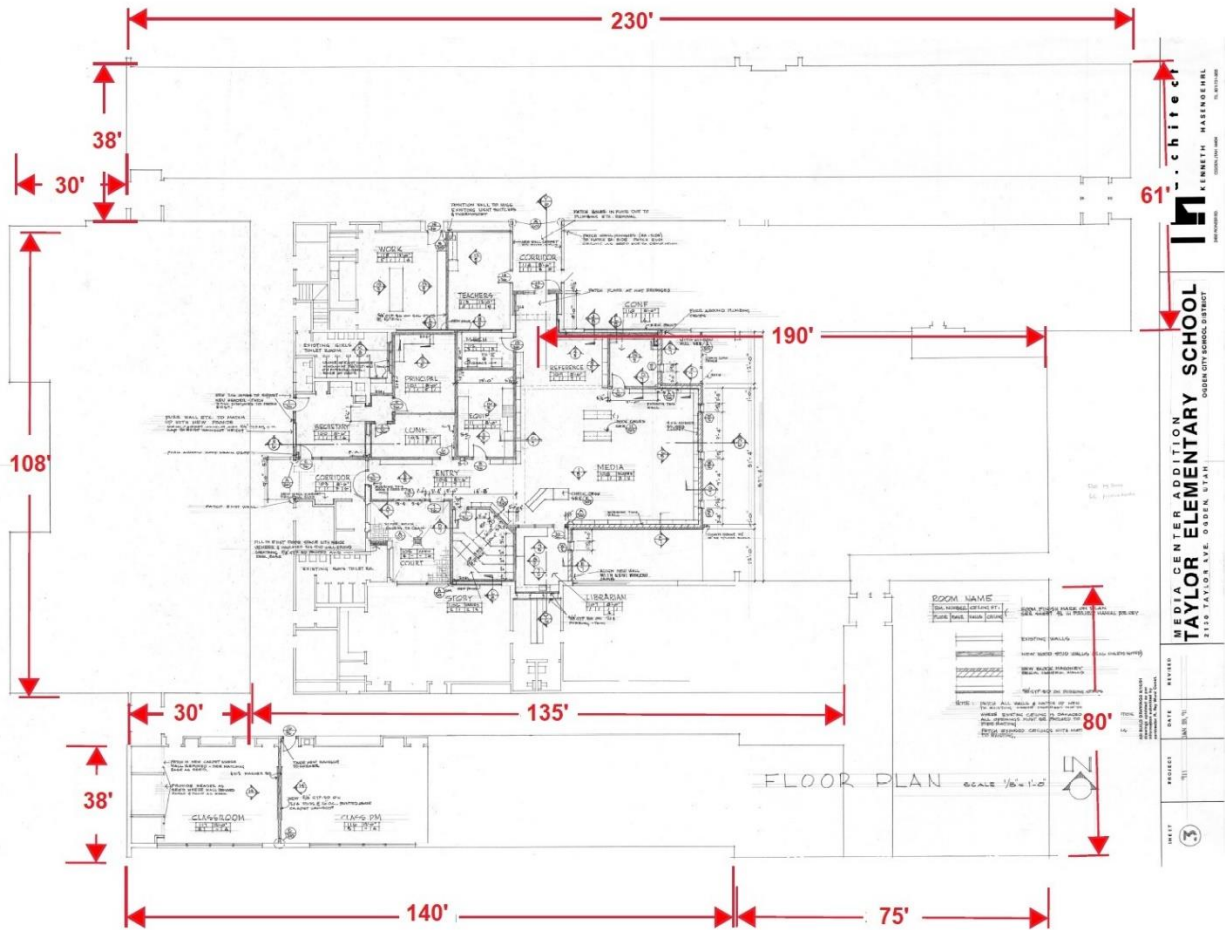

Everything on north side is 3' x 3' tunnel
 Every Tunnel on the South Side is 35' wide

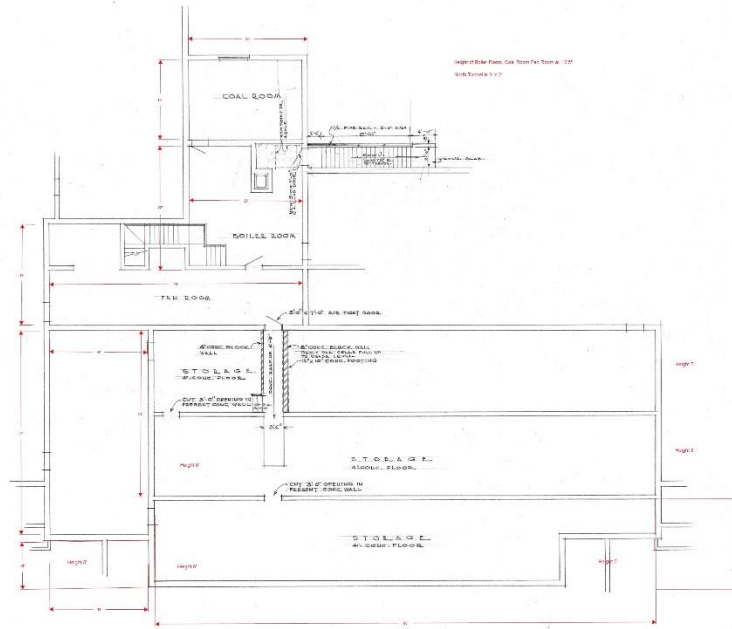

ADDITIONAL BASEMENT STORAGE AREA
 OAK ELEMENTARY SCHOOL
 OGDEN CITY SCHOOL DISTRICT

PROJECT NO. 11-30	DATE 11-30	DESIGNED BY JIMMY HOLCOMB	CHECKED BY JIMMY HOLCOMB	SCALE AS SHOWN
-------------------	------------	---------------------------	--------------------------	----------------